

# CD6309 - CD6349




## 0.5 W Zener Diode Chips

Rev. V3

### Features

- Low reverse Leakage Characteristics
- Low Noise Characteristics
- All Junctions Completely Protected with Silicon Dioxide
- Electronically Equivalent to 1N6309 - 1N6349
- Compatible with All Wire Bonding and Die Attach Techniques
- JANHC, JANKC available per MIL-PRF-19500/533



### Description

This zener diode chip series is military qualified to MIL-PRF-19500/533 and is ideal for high reliability applications where a failure cannot be tolerated. It includes zener selections from 2.4 to 110 volts in standard 5% tolerances as well as tighter tolerances identified by different suffix letters on the part number. They are also available in surface mount and axial lead packages. VPT Components also offers numerous other zener products to meet higher and lower power ratings in both thru-hole and surface mount packages.

### Electrical Specifications

Part Types <sup>1</sup>	Zener Voltage	Test Current	Dynamic Impedance		Current Maximum Zener	Voltage Reg. <sup>2</sup>	Reverse Current		Noise Density
	+/-5% @ IZ1	IZT	ZZT @ IZ2	ZZK @ 250 $\mu$ A	IZM	VZ (reg.)	I <sub>R1</sub> @ V <sub>R</sub> 25°C		@ 250 mA 1 to 3 kHz
	Volts	mA	Ohms		mA	Volts	$\mu$ A	Volts	$\mu$ V / $\sqrt{\text{Hz}}$
	Nom.	Typ.	Typ.		Max.	Typ.	Max.		Max.
CD6309	2.4	20	30	1200	177	1.5	100	1.0	1
CD6310	2.7	20	30	1300	157	1.5	60	1.0	1
CD6311	3.0	20	29	1400	141	1.5	30	1.0	1
CD6312	3.3	20	27	1400	128	1.6	5	1.0	1
CD6313	3.6	20	25	1400	117	1.6	3	1.0	1
CD6314	3.9	20	23	1700	108	1.6	2	1.0	1
CD6315	4.3	20	20	1900	99	0.90	2	1.0	1
CD6316	4.7	20	17	1500	90	0.50	5	1.5	1
CD6317	5.1	20	14	1300	83	0.40	5	2.0	1
CD6318	5.6	20	8	1200	76	0.40	5	2.5	2
CD6319	6.2	20	3	800	68	0.30	5	3.5	5
CD6320	6.8	20	3	400	63	0.35	2	4.0	5
CD6321	7.5	20	4	400	57	0.40	2	5.0	5
CD6322	8.2	20	5	400	52	0.40	1	6.0	20

(Continued next page)

### Electrical Specifications

Part Types <sup>1</sup>	Zener Voltage	Test Current	Dynamic Impedance		Current Maxium Zener	Voltage Reg. <sup>2</sup>	Reverse Current		Noise Density
	+/-5% @ IZ1	IZT	ZZT @ IZ2	ZZK @ 250 $\mu$ A	IZM	VZ (reg.)	I <sub>R1</sub> @ V <sub>R</sub> 25°C		@ 250 mA 1 to 3 kHz
	Volts	mA	Ohms		mA	Volts	$\mu$ A	Volts	$\mu$ V / $\sqrt{\text{Hz}}$
	Nom.	Typ.	Typ.		Max.	Typ.	Max.		Max.
CD6323	9.1	20	6	500	47	0.50	1	7.0	40
CD6324	10	20	6	500	43	0.50	1	8.0	80
CD6325	11	20	7	550	39	0.50	1.0	8.5	100
CD6326	12	20	7	550	35	0.55	1.0	9.0	100
CD6327	13	12	8	550	33	0.55	0.05	9.9	100
CD6328	15	8.5	10	600	28	0.70	0.05	11	100
CD6329	16	7.8	12	600	27	0.75	0.05	12	100
CD6330	18	7.0	14	600	24	0.85	0.05	14	100
CD6331	20	6.2	18	500	21	0.95	0.05	15	100
CD6332	22	5.6	20	500	19	1.05	0.05	17	100
CD6333	24	5.2	24	500	18	1.15	0.05	18	100
CD6334	27	4.6	27	500	16	1.30	0.05	21	100
CD6335	30	4.2	32	500	14	1.45	0.05	23	100
CD6336	33	3.8	40	600	13	1.60	0.05	25	100
CD6337	36	3.4	50	600	12	1.75	0.05	27	100
CD6338	39	3.2	55	700	11	1.90	0.05	30	100
CD6339	43	3.0	65	800	9.9	2.10	0.05	33	80
CD6340	47	2.7	75	900	9.0	2.25	0.05	36	80
CD6341	51	2.5	85	1000	8.3	2.50	0.05	39	80
CD6342	56	2.2	100	1200	7.6	2.70	0.05	43	80
CD6343	62	2.0	125	1300	6.8	2.90	0.05	47	80
CD6344	68	1.8	155	1500	6.3	3.20	0.05	52	80
CD6345	75	1.7	180	1600	5.7	3.40	0.05	56	80
CD6346	82	1.5	220	1800	5.2	3.80	0.05	62	80
CD6347	91	1.4	270	2100	4.7	4.20	0.05	69	80
CD6348	100	1.3	340	2400	4.3	4.40	0.05	76	80
CD6349	110	1.1	500	2800	3.9	4.80	0.05	84	80


1. The JEDEC type numbers shown above have a standard tolerance of  $\pm 5\%$  of the nominal Zener voltage. Nominal Zener voltage is measured with the device junction in thermal equilibrium at an ambient temperature of  $25^\circ\text{C} \pm 3^\circ\text{C}$ . Suffix "C" signifies  $\pm 2\%$ , suffix "D" signifies  $\pm 1\%$  tolerance.
2.  $V_Z \text{ REG} = V_Z @ 50\% \text{ of } I_{ZM} \text{ minus } V_Z @ 10\% \text{ of } I_{ZM}$ .
3. Zener impedance is derived by superimposing on 1 ZZT A 60 Hz rms a.c. current equal to 10% of 1 ZZT or 1 ZZK.

### Absolute Maximum Ratings<sup>4,5</sup>


Parameter	Absolute Maximum
Forward Voltage	1.4 V @ 1 A
Storage Temperature	-65°C to +175°C
Operating Temperature	-65°C to +175°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- VPT Components does not recommend sustained operation near these survivability limits.

### Zener Impedance vs. Operating Current

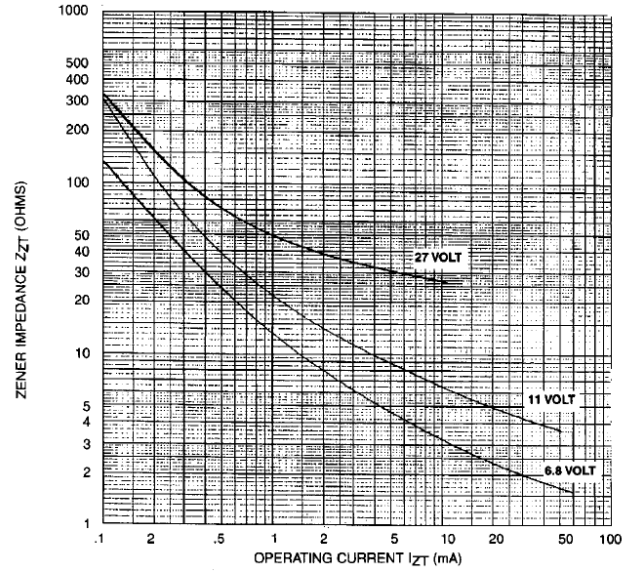

### Die

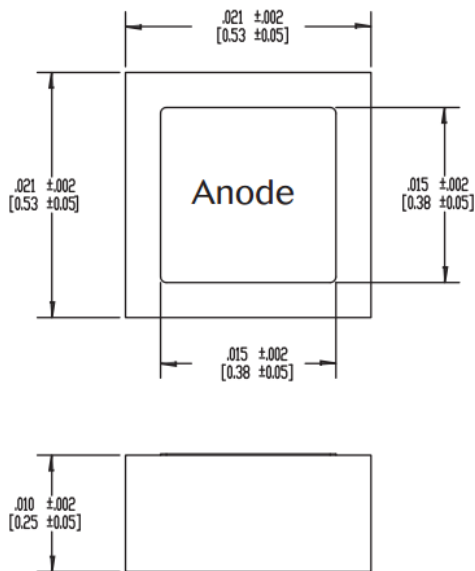

**Metallization:** Top: (anode) AL  
 Back: (cathode) Au  
**AL Thickness:** 25,000 Å Minimum  
**Gold Thickness:** 3,500 Å Minimum  
**Chip Thickness:** 10 mils  
**Circuit Layout Data:** For Zener operation, cathode must be operated positive with respect to anode.

**VPT COMPONENTS. ALL RIGHTS RESERVED.**

Information in this document is provided in connection with VPT Components products. These materials are provided by VPT Components as a service to its customers and may be used for informational purposes only. Except as provided in VPT Components Terms and Conditions of Sale for such products or in any separate agreement related to this document, VPT Components assumes no liability whatsoever. VPT Components assumes no responsibility for errors or omissions in these materials. VPT Components may make changes to specifications and product descriptions at any time, without notice. VPT Components makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF VPT COMPONENTS PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. VPT COMPONENTS FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. VPT COMPONENTS SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

VPT Components products are not intended for use in medical, lifesaving or life sustaining applications. VPT Components customers using or selling VPT Components products for use in such applications do so at their own risk and agree to fully indemnify VPT Components for any damages resulting from such improper use or sale.