

# 1N4565-1 thru 1N4584-1 & 1N4565A-1 thru 1N4584A-1




## Temperature Compensated Zener Reference Diode Series

Rev. V2

### Features

- Available in JAN, JANTX, JANTXV and JANS per MIL-PRF-19500/452
- 6.4 V Nominal Zener Voltage  $\pm 5\%$
- 500 mW Power Handling
- Axial-leaded Glass DO-35 Style Package
- Also Available in a Hermetically sealed MELF DO-213AA package



### Electrical Specifications:

$I_R = 2 \mu A$  @  $+25^\circ C$  &  $V_R = 3 V_{dc}$ ,  $T_A = +25^\circ C$  (unless otherwise specified)

JEDEC Type #	Zener Test Current $I_{ZT}$	Effective Temperature Coefficient	Voltage Temperature Stability $\Delta V_{ZT}$ max. <sup>1</sup>	Temperature Range	Maximum Dynamic Zener Impedance <sup>2</sup>
	mA	%/ $^\circ C$	mV	$^\circ C$	$\Omega$
1N4565-1 1N4565A-1	0.5	0.01	48 100	0 to +75 -55 to +100	200
1N4566-1 1N4566A-1	0.5	0.005	24 50	0 to +75 -55 to +100	200
1N4567-1 1N4567A-1	0.5	0.002	10 20	0 to +75 -55 to +100	200
1N4568-1 1N4568A-1	0.5	0.001	5 10	0 to +75 -55 to +100	200
1N4569-1 1N4569A-1	0.5	0.0005	2.5 5.0	0 to +75 -55 to +100	200
1N4570-1 1N4570A-1	1.0	0.01	48 100	0 to +75 -55 to +100	100
1N4571-1 1N4571A-1	1.0	0.005	24 50	0 to +75 -55 to +100	100
1N4572-1 1N4572A-1	1.0	0.002	10 20	0 to +75 -55 to +100	100
1N4573-1 1N4573A-1	1.0	0.001	5 10	0 to +75 -55 to +100	100
1N4574-1 1N4574A-1	1.0	0.0005	2.5 5.0	0 to +75 -55 to +100	100
1N4575-1 1N4575A-1	2.0	0.01	48 100	0 to +75 -55 to +100	50
1N4576-1 1N4576A-1	2.0	0.005	24 50	0 to +75 -55 to +100	50

(Continued next page)

# 1N4565-1 thru 1N4584-1 & 1N4565A-1 thru 1N4584A-1



## Temperature Compensated Zener Reference Diode Series

Rev. V2

### Electrical Specifications:

$I_R = 2 \mu A$  @  $+25^\circ C$  &  $V_R = 3 V_{dc}$ ,  $T_A = +25^\circ C$  (unless otherwise specified)

JEDEC Type #	Zener Test Current $I_{ZT}$	Effective Temperature Coefficient	Voltage Temperature Stability $\Delta V_{ZT}$ max. <sup>1</sup>	Temperature Range	Maximum Dynamic Zener Impedance <sup>2</sup>
	mA	%/°C	mV	°C	Ω
1N4577-1 1N4577A-1	2.0	0.002	10 20	0 to +75 -55 to +100	50
1N4578-1 1N4578A-1	2.0	0.001	5 10	0 to +75 -55 to +100	50
1N4579-1 1N4579A-1	2.0	0.0005	2.5 5.0	0 to +75 -55 to +100	50
1N4580-1 1N4580A-1	4.0	0.01	48 100	0 to +75 -55 to +100	25
1N4581-1 1N4581A-1	4.0	0.005	24 50	0 to +75 -55 to +100	25
1N4582-1 1N4582A-1	4.0	0.002	10 20	0 to +75 -55 to +100	25
1N4583-1 1N4583A-1	4.0	0.001	5 10	0 to +75 -55 to +100	25
1N4584-1 1N4584A-1	4.0	0.0005	2.5 5.0	0 to +75 -55 to +100	25

1. The maximum allowable change observed over the entire temperature range i.e., the diode voltage will not exceed the specified mV at any discrete temperature between the established limits, per JEDEC standard No. 5.
2. Zener impedance is derived by superimposing on  $I_{ZT}$  A 60Hz rms a.c. current equal to 10% of  $I_{ZT}$ .

### Absolute Maximum Ratings





Parameter	Absolute Maximum
DC Power Dissipation	500 mW @ $+50^\circ C$
Power Derating	4 mW/°C above $+50^\circ C$
Operating & Storage Temperature	$-65^\circ C$ to $+175^\circ C$

# 1N4565-1 thru 1N4584-1 & 1N4565A-1 thru 1N4584A-1





## Temperature Compensated Zener Reference Diode Series

Rev. V2

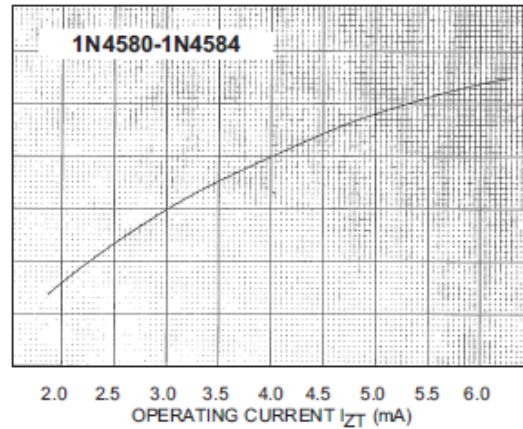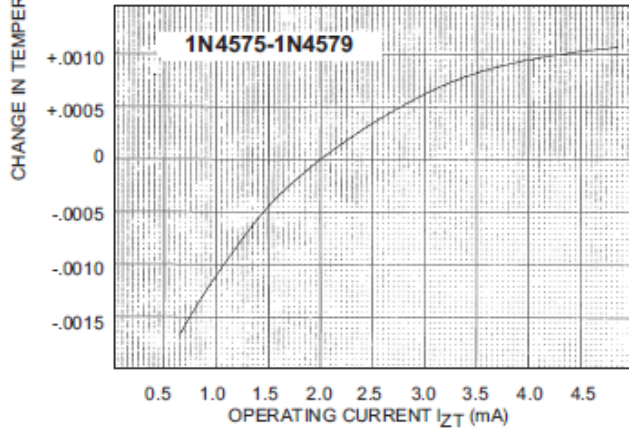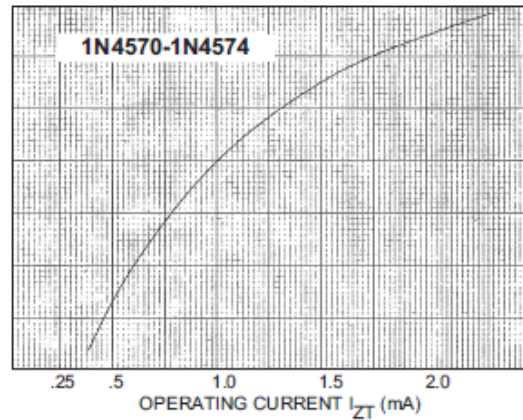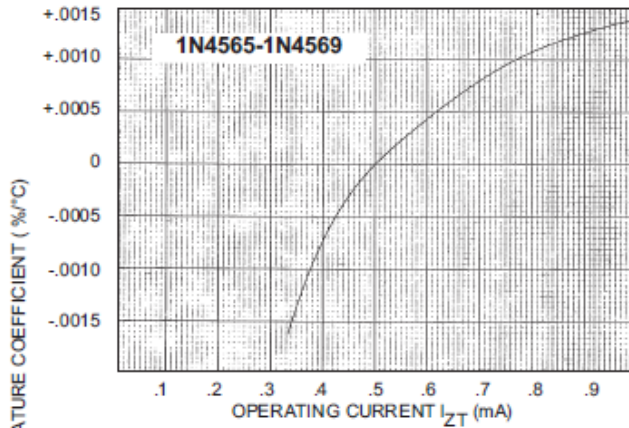

### TYPICAL CHANGE OF TEMPERATURE COEFFICIENT WITH CHANGE IN OPERATING CURRENT

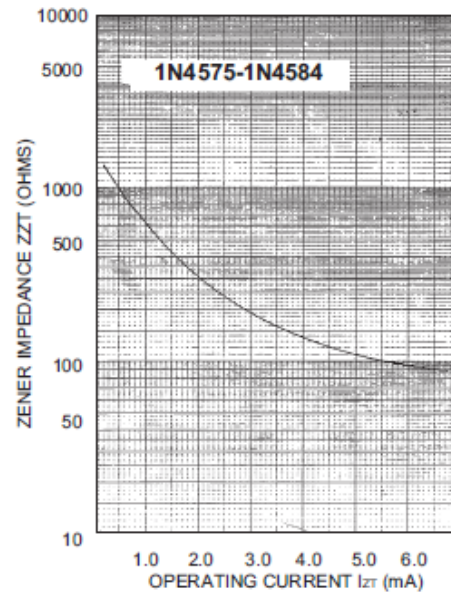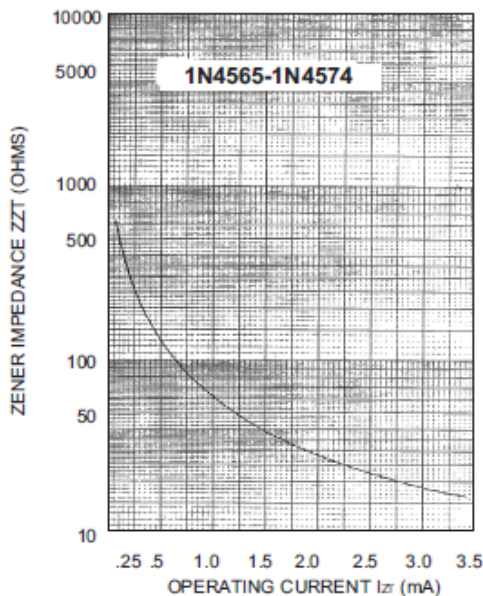


### ZENER IMPEDANCE VS. OPERATING CURRENT

# 1N4565-1 thru 1N4584-1 & 1N4565A-1 thru 1N4584A-1

## Temperature Compensated Zener Reference Diode Series

Rev. V2

### Outline

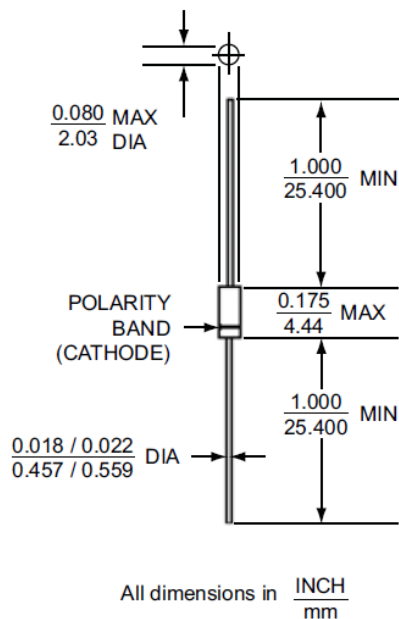

### Leaded Design Data

**Case:** DO-35, Hermetically sealed

**Lead Material:** Copper Clad Steel

**Lead Finish:** Tin / Lead

**Polarity:** Cathode end is banded.

**Mounting Position:** Any.

# 1N4565-1 thru 1N4584-1 & 1N4565A-1 thru 1N4584A-1



## Temperature Compensated Zener Reference Diode Series

Rev. V2

VPT Components All rights reserved.

Information in this document is provided in connection with VPT Components' products. These materials are provided by VPT Components as a service to its customers and may be used for informational purposes only. Except as provided in VPT Components' Terms and Conditions of Sale for such products or in any separate agreement related to this document, VPT Components assumes no liability whatsoever. VPT Components assumes no responsibility for errors or omissions in these materials. VPT Components may make changes to specifications and product descriptions at any time, without notice. VPT Components makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF VPT COMPONENTS' PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. VPT COMPONENTS FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. VPT COMPONENTS SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

VPT Components products are not intended for use in medical, lifesaving or life sustaining applications. VPT Components' customers using or selling VPT Components products for use in such applications do so at their own risk and agree to fully indemnify VPT Components for any damages resulting from such improper use or sale.